

Flashback Arrestor according to EN 730-1, ISO 5175

Model: **GG**



For Torch Side protection.



Whether at the Flame Cutting machine or at Burner the compact design offers the possibility for installation with smallest possible space.

Safety features:

- Gas non-return valve NV
- Flame arrestor FA

Dust filter promotes long shelf-life

Threads:

In accordance with EN 560, ISO 3253 or country specific connections

Fuel Gas: G3/8"LH, M16X1.5LH, UNF9/16"-18LH, UNF5/8"-18LH, 1/4"-NPT

Oxygen/Compressed Air: G1/4"RH, G3/8"RH, M16X1.5RH, UNF9/16"-18RH, UNF5/8"-18RH, 1/4"-NPT

For additional connections please contact IBEDA

Gas-Types:

Acetylene (A), Town Gas (C), Ethylene (E), Hydrogen (H), Natural Gas (Methane) (M), Propane (P), MPS Methyl-acetylen-Propadien-Mixture (Y), Oxygen (O), Compressed Air (D)

Working pressure:

A 1.5 bar ; H 3.5 bar ; CEMPY 5.0 bar ; DO 15.0 bar

Measure and weight:

diameter: 21,00 mm

length: 57,00 mm

weight: 96,10 g

Maintenance:

The safety devices are to be tested by a qualified and authorised person at regular intervals according to country specific regulations. They are to be tested for gas tightness and gas return at least once a year.

Design:

Other materials and surface finishing on request.






CERTIFIED SAFETY

Worldwide!

Flashback Arrestor according to EN 730-1, ISO 5175

Model: **GG**

Flow-Rate Dates:

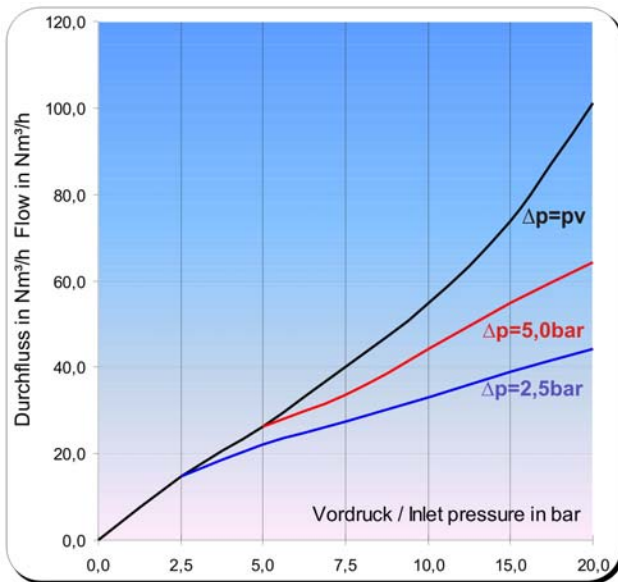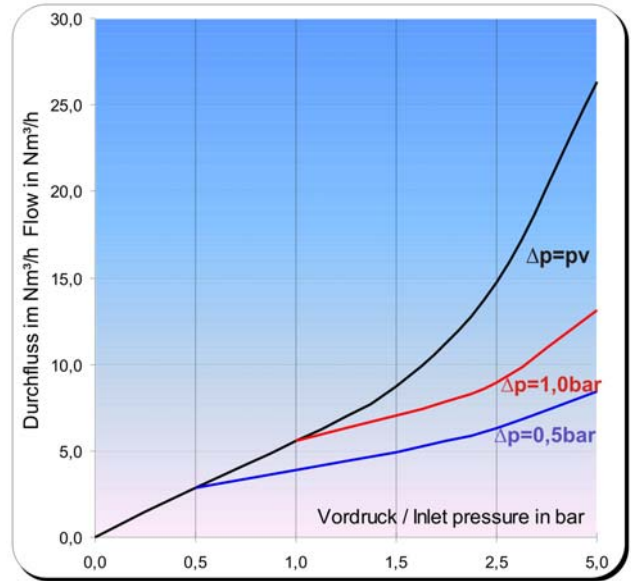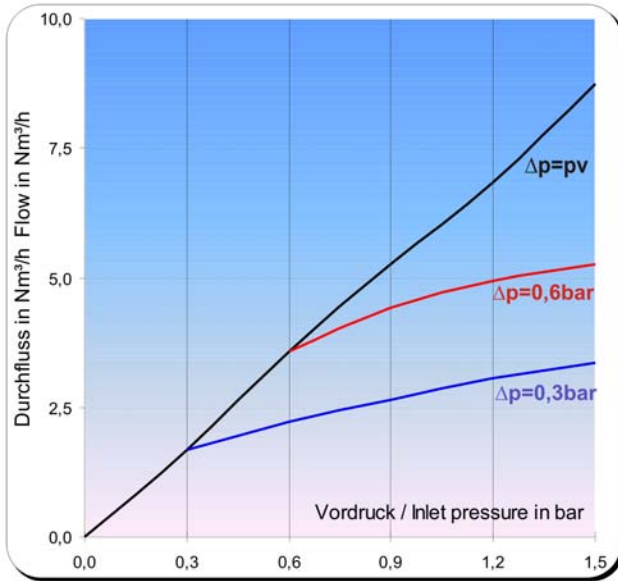

Conversion Factors

Gas type	Code	Pressure units:
Acetylen	A	1MPa = 10bar
Oxygen	O	1bar = 14,28psi
Hydrogen	H	1MPa = 1,428psi
Air	D	1bar = 100kPa
Natural Gas, Methane	M	1m³ = 1,31cu.yd
Propane	P	
Ethene	E	
MPS	Y	

Flow rate

Air	Air	1,00
Air	Acetylen	1,20
Air	Butane	0,86
Air	Natural Gas	1,25
Air	Methane	1,40
Air	Propane	0,90
Air	Oxygen	0,95
Air	Hydrogen	2,50
Air	Ethene	1,02
Air	MPS	0,81



CERTIFIED SAFETY

Worldwide!